




PFK高速刀把

PFK HIGH SPEED COLLET CHUCK

DIN 69893 FORM A

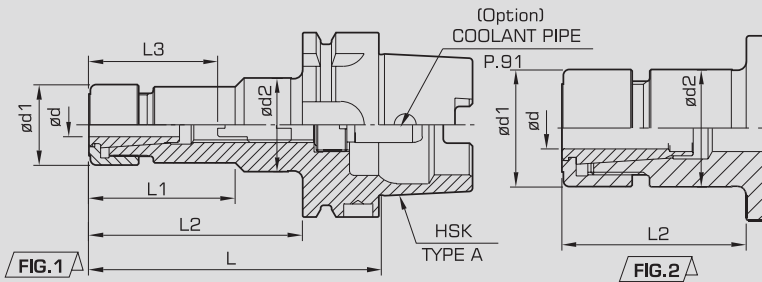

FEATURE

RUN-OUT

BALANCING

APPLICATION

5 μ m[★]

G6.3
25,000 RPM

G2.5
25,000 RPM
選配 Option



精加工

高速

鑽孔 DRILLING 鉸孔 REAMING 攻牙 TAPPING 銑削 ENDMILLING 精加工 FINISHING 高速 HIGH SPEED

SPECIFICATION

訂購編號 ORDER NO	FIG	夾持範圍 RANGE ϕd	$\phi d1$	L	L1	刀具 夾持 深度 L2	螺帽 Nut page. 102	調整 螺絲 Screw page. 101	筒夾 Collet page. 99	扳手 Wrench page. 103	
HSK50A	PFK10-100S	2	1.75~10.0	27.5	100	74	30~40	CAP-PFK10S	PFK-M12	PFK10	PHS-PR275
	PFK16-100S	2	2.75~16.0	40	100	74	40~48	CAP-PFK16S	PFK-M12	PFK16	PHS-HER25-RO40
HSK63A	PFK10-105S	2	1.75~10.0	27.5	105	79	30~40	CAP-PFK10S	PFK-M12	PFK10	PHS-PR275
	PFK16-105S	2	2.75~16.0	40	105	79	40~48	CAP-PFK16S	PFK-M12	PFK16	PHS-HER25-RO40
HSK100A	PFK10-105S	1	1.75~10.0	27.5	105	76	30~40	CAP-PFK10S	PFK-M12	PFK10	PHS-PR275
	PFK16-105S	2	2.75~16.0	40	105	76	40~48	CAP-PFK16S	PFK-M12	PFK16	PHS-HER25-RO40

★需配合3 μ P級筒夾 With 3 μ P Grade Collet

電動增速器
SPINDLE SPEEDER

HSK-A
DIN 69893 FORM A

HSK-E
DIN 69893 FORM E

BT
JIS B6339
(MAS 403 BT)

BTN
BTN HOLDER
WITHOUT KEYWAY

SK
DIN 69871

ISO

延長桿
EXTENSION BAR

刀把配件
SPARE PARTS